



PART DETAIL (SHEET 1 OF 1)

DDE-0057-00





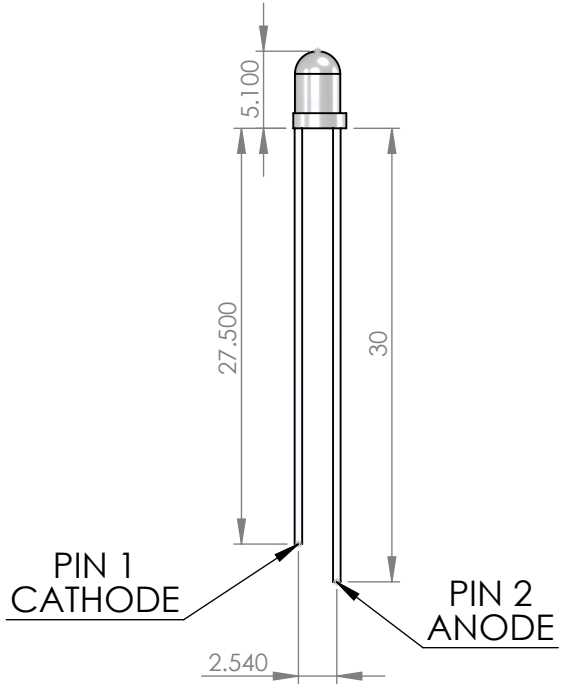

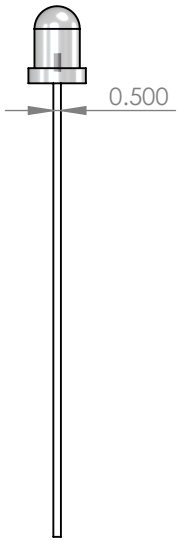

Wavelength (nm)	575-580nm
Typical Forward Voltage (v)	2.8-3.2V
Typical Luminous Intensity (mcd)	2600
Constant Forward Current (ma)	20ma
Reverse Voltage (v)	5v
Operating Temperature (deg C)	-40 to +80
Storage Temperature (deg C)	-40 to +85
Lead Soldering Temperature (deg C)	Max.260±5°C for 3 sec Max.

REVISION HISTORY	NAME	DATE
DRAWN	Scott Danesi	11/9/2026
LAST MODIFIED	Scott Danesi	11/9/2026

NOTES

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DANESI DESIGNS. ANY REPRODUCTION IN PART OR AS A WHOLEWITHOUT THE WRITTEN PERMISSION OF PINBALL LIFE IS PROHIBITED.

DIMENSIONS ARE IN MM
TOLERANCES:

LINEAR	ANGULAR
.X +/- 0.010	+/- 0.25
.XX +/- 0.010	DEGREES
.XXX +/- 0.010	

UNLESS OTHERWISE SPECIFIED

MATERIAL
EPOXY LED

FINISH
WHITE FROSTED LENS

SCALE 2:1 | SIZE 11" x 8.5"

TITLE
3mm True Yellow LED

DANESI DESIGNS
Danesi Designs, LLC.
PO Box 838
West Dundee, IL 60118

REV
-

REV NOTES:
INITIAL VERSION

PART NUMBER
DDE-0057-00

FILE
DDE-0057-00 3mm True Yellow LED